

# TPG7

# Acorn Post Top Light

30W- 50W- 60W / 60W- 80W- 100W Power Selectable



## Specifications

Wattage	30W / 50W / 60W / 80W / 100W / Power Selectable
LED Chip	SMD 3030, Lumileds or Other LED Chips
Driver Brand	SOSEN / ZHIHE/ FAHOLD or Other Brand
CCT	3000K / 4000K / 5000K / 5700K optional , 3CCT Selectable
Light Output	3600lm / 6000lm / 7200lm / 9300lm / 11600lm
Efficacy	110-120 LM/W (Can customize higher LM/W if needed)
AC Input Voltage	100~277V / 120-347V / 277-480V
Light Distribution	Type V
Exclusive Feature(1)	Button Photocell Sensor Available
Exclusive Feature(2)	Acrylic Diffuser / PC Diffuser Optional
Exclusive Feature(3)	3CCT / Power Tunable Available
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)
Total Harmonic Distortion (THD)	< 20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

# Features



CCT Select



Power Select



Photocell sensor



ADC12 Die casting


## Button Photocell Sensor (Optional)




## CCT Select & Power Select



## Dimension

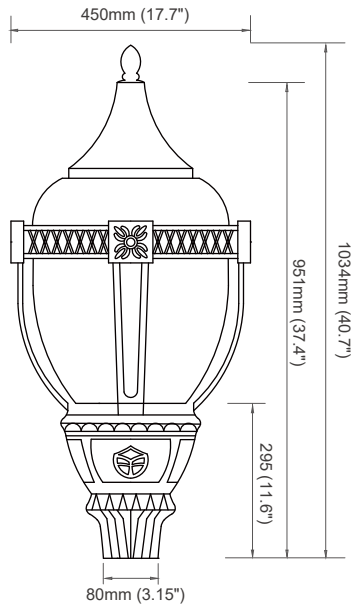

**100W-60W**

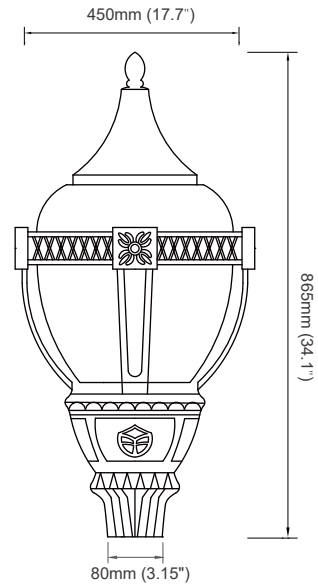

**60W-30W**

## Applications




**Street / Walkway**




**Community**

# Light Distribution

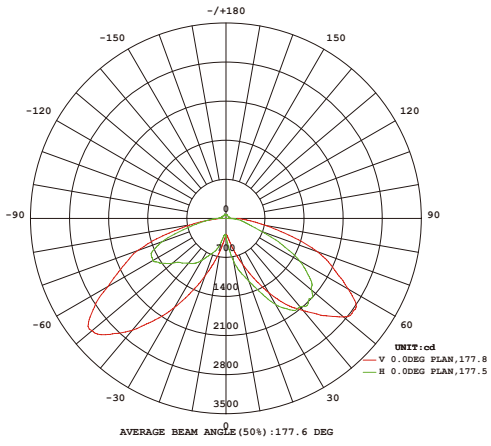

# Installation

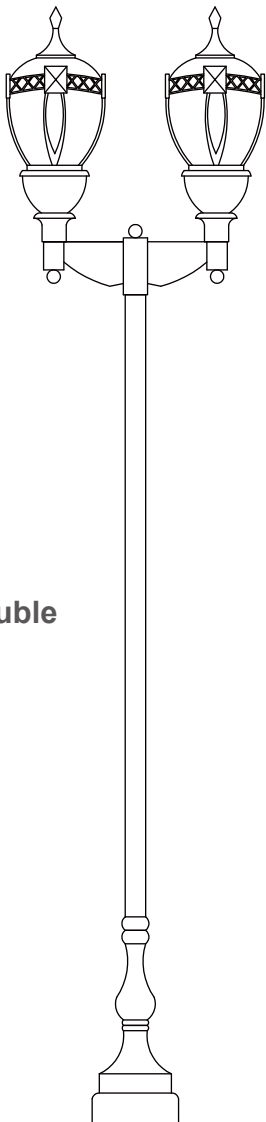

Double



Single

## Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension (mm/in)	N.W (Kg/lb) (1pc)	G.W (Kg/lb) (1ctn)	qty/ctn
100W-60W	450 x 450 x 951 mm 17.72 x 17.72 x 37.44 in	540 x 540 x 980 mm 21.26 x 21.26 x 38.58 in	8.5Kg(18.74lbs)	11.8Kg(26.00lbs)	1 PCS
60W-30W	450 x 450 x 865 mm 17.72 x 17.72 x 37.44 in	540 x 540 x 895 mm 20.87 x 20.87 x 34.10 in	6.2Kg(13.67lbs)	9.0Kg(19.80lbs)	1 PCS

### Carton Box

