

LED TRACK LIGHT(TL04)

Wattages: 10W, 15W, 20W,25W, 30W



Support Halo/Juno exchangeable adapter.
90+CRI with 3-step MacAdam Ellipse.
High-Efficacy with precise Center Beam
Candle Power.
Can pivot +/-90° vertically.
With adjustable focus
Recommended Application: Retailers,
Supermarkets,
Restaurants, Shopping Mall, etc.



PRODUCT FEATURES:

- 110LPW & Triac dimming for single CCT and wattage.
- 90LPW & Non-dimmable for CCT & wattage selectable.
- Daisy connection with very convenient replacement in 1minute.
- Single voltage: AC120V.
- Available with suspending installation and surface-mounted installation.
- 20°-50°Beam Angle for variety choices.
- 5 years warranty.


SPECIFICATION					
MODEL	SS-TL04-10W -XXK-YY-X-Z	SS-TL04-20W -XXK-YY-X-Z	SS-TL04-30W -XXK-YY-X-Z	SS-TL04-120/15/10W -TCP-YY-X-Z	SS-TL04-30/25/20W -TCP-YY-X-Z
WATTAGE	10W	20W	30W	20/15/10W	30/25/20W
CCT	2700K/3000K/3500K/4000K/5000K Single CCT			2700K/3000K/3500K/4000K/5000K Selectable CCT	
EFFICACY	Up to 110LPW			Up to 90LPW	
CRI	Ra >90				
INPUT VOLTAGE	AC120V				
DISTRIBUTION	20-50°adjustable				
POWER FACTOR	0.9				
DRIVER EFFICACY	87%				
LIFE SPAN	over 50,000 hrs				
WORKING TEMPERATURE	-40°F~104°F				
STORAGE TEMPERATURE	-40°F~176°F				
WARRANTY	5 year limited				

LED TRACK LIGHT(TL04)

Wattages: 10W, 15W, 20W, 25W, 30W


Adapter:

- Compatible with H-type track adapter, J-type track adapter, suitable for all your projects requirements.
- H type and J-type track adapter are interchangeable

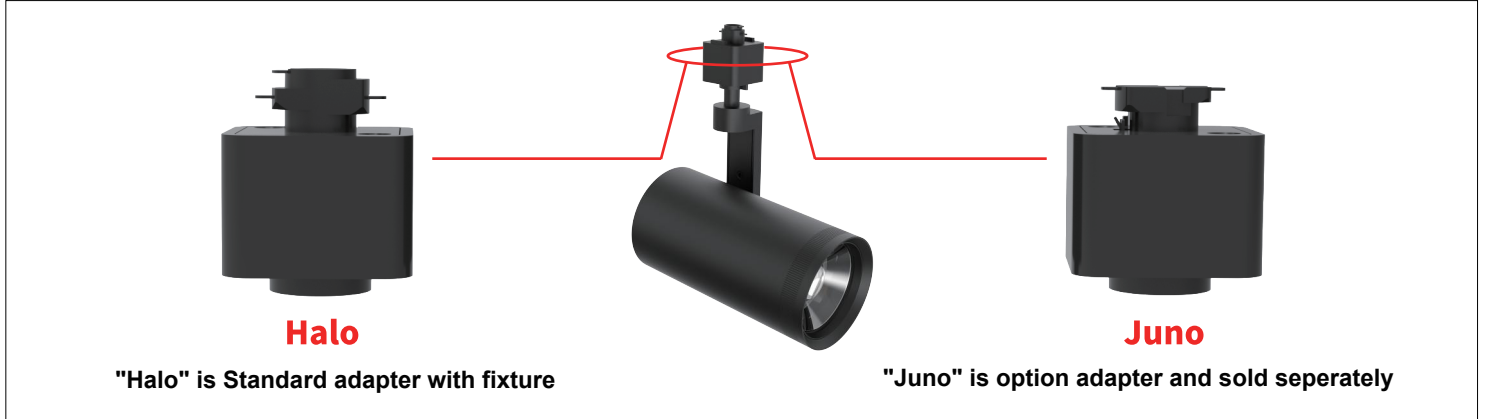

Luminaire Arm:

- 180° tilt and 350° rotation adjustable

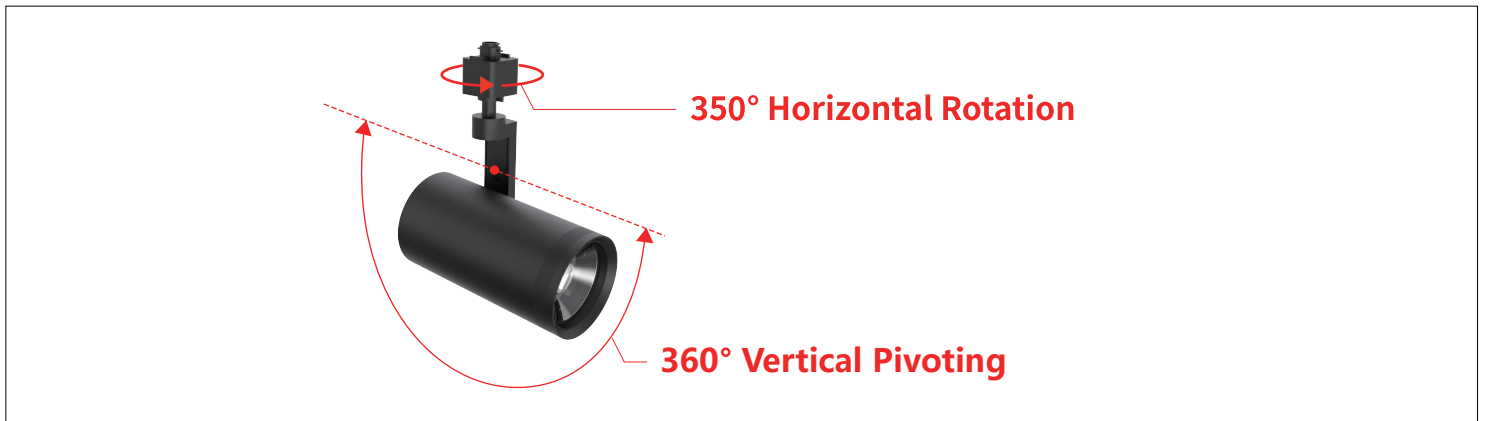

Beam angle:

- Zoomable track light heads 20° - 50° adjustable to meet different application requirements



Application:


- Recommended Use for Retailers, Supermarkets, Restaurants, Shopping Mall, Grocery, Hospitality, Commercial, Residential, Exhibit etc.

LED TRACK LIGHT(TL04)


Wattages: 10W, 15W, 20W, 25W, 30W

PRODUCT DIMENSION:


10W

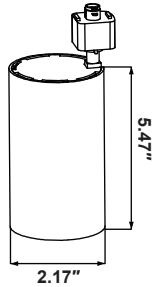




20W | 20/15/10W

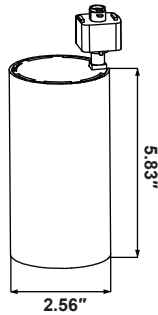

30W | 30/25/20W

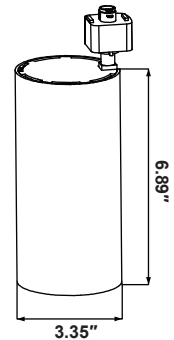

Power(Size)	Inner packing size (1 pcs/ctn)	Outer packing size (20pcs/ctn)	N.W. (1pcs/ctn)	G.W. (1pcs/ctn)	N.W. (20pcs/ctn)	G.W. (20pcs/ctn)
SS-TL04-10W -XXK-YY-X-Z	L4.17 * W3.5 * H10.2inch L106 * W89 * H259mm	L18.5 * W17.68 * H10.98inch L470 * W449 * H279mm	1.59Lbs(0.72KG)	2.09Lbs(0.95KG)	31.75Lbs(14.4KG)	43.65Lbs(19.8KG)
SS-TL04-20W -XXK-YY-X-Z	L4.17 * W3.5 * H10.2inch L106 * W89 * H259mm	L18.5 * W17.68 * H10.98inch L470 * W449 * H279mm	1.59Lbs(0.72KG)	2.09Lbs(0.95KG)	31.75Lbs(14.4KG)	43.65Lbs(19.8KG)
SS-TL04-30W -XXK-YY-X-Z	L5 * W4.29 * H11.14inch L127 * 109 * 283mm	L22.17 * W20.91 * H11.93inch L563 * 531 * 303mm	2.60Lbs(1.18KG)	3.11Lbs(1.41KG)	52.03Lbs(23.6KG)	64.82Lbs(29.4KG)
SS-TL04-20/15/10W -TCP-YY-X-Z	L4.17 * W3.5 * H10.2inch L106 * W89 * H259mm	L18.5 * W17.68 * H10.98inch L470 * W449 * H279mm	1.59Lbs(0.72KG)	2.09Lbs(0.95KG)	31.75Lbs(14.4KG)	43.65Lbs(19.8KG)
SS-TL04-30/25/20W -TCP-YY-X-Z	L5 * W4.29 * H11.14inch L127 * 109 * 283mm	L22.17 * W20.91 * H11.93inch L563 * 531 * 303mm	2.60Lbs(1.18KG)	3.11Lbs(1.41KG)	52.03Lbs(23.6KG)	64.82Lbs(29.4KG)

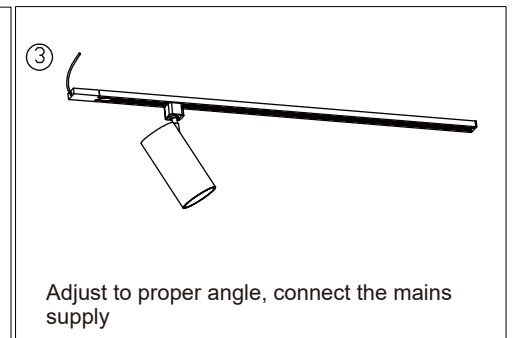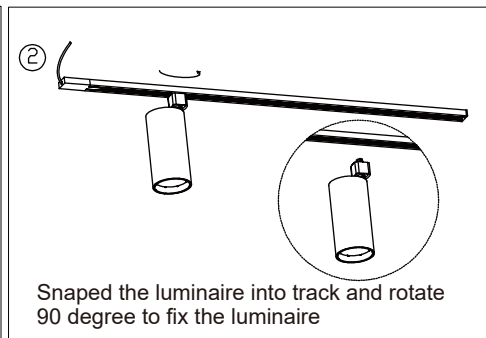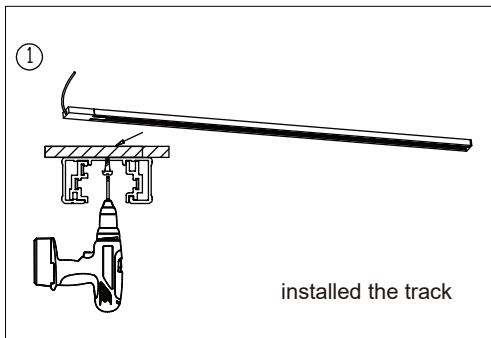


Other installation methods



LED TRACK LIGHT(TL04)

Wattages: 10W, 15W, 20W, 25W, 30W


Optional accessories

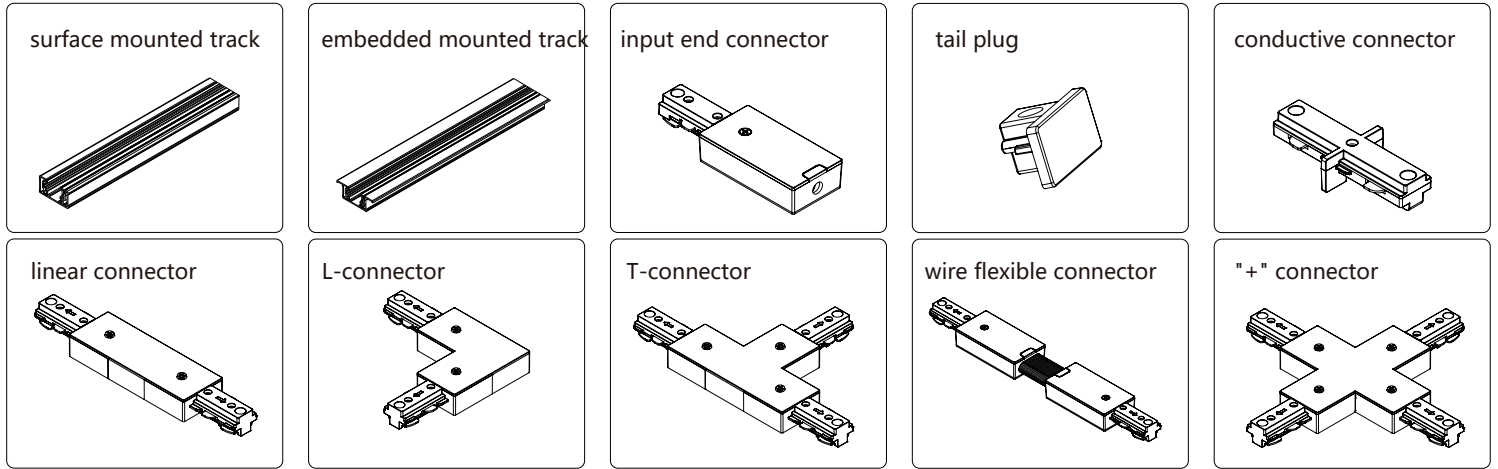

ORDERING GUIDE:

EXAMPLE:

SS-TL04-20W-H-XX-TCP(XX)

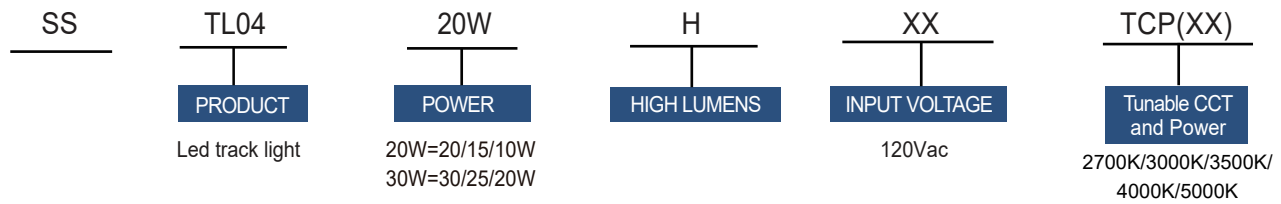

/// Rail system connection diagram:

Before installation, cut off the spring tab on one side of the ground wire connector and connect it effectively to the track's ground copper wire.

